
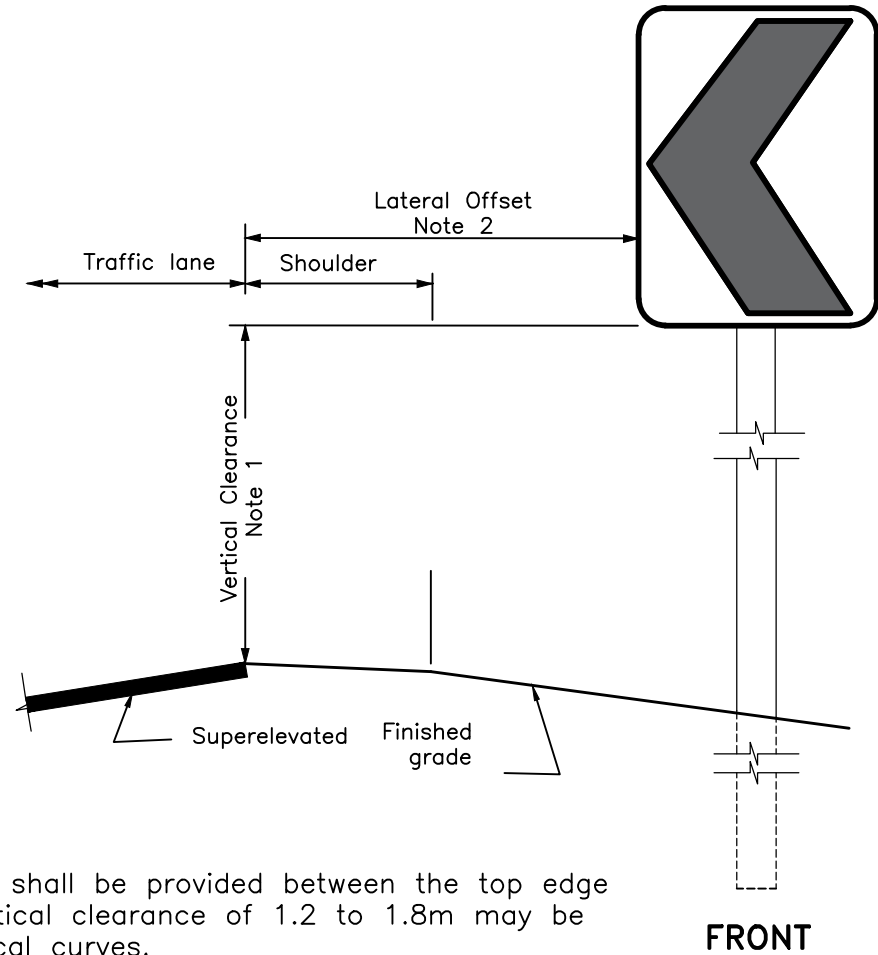


Wa-9 CHEVRON ALIGNMENT Sign

Wa-33 OBJECT MARKER Sign

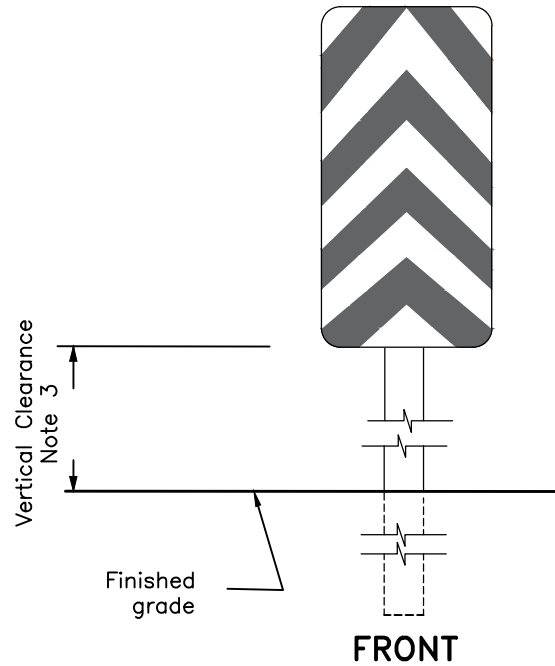

NOTES:

1. For Chevron signs, minimum vertical clearance of 1.5m shall be provided between the top edge of nearest traveled lane and the bottom of sign. A vertical clearance of 1.2 to 1.8m may be provided to accommodate low beam headlights on vertical curves.
2. Lateral offset of 1.0 to 6.0m shall be provided for a posted speed up to 70 km/h and 4.0 to 6.0m for a posted speed greater than 70 km/h.
3. When Object Marker sign installed in painted or curbed gore areas, a vertical clearance of 0.3 to 0.45m shall be provided between the finished grade and the bottom of sign and shall be on a non-breakaway support.
- A. Breakaway sign support shall be used where minimum vertical clearance between the finished grade and the bottom of sign is 2.1m.

|   |  |              |     |   |
|---|--|--------------|-----|---|
| MINISTRY OF TRANSPORTATION ONTARIO DRAWING  |  | June 2021    | Rev | 0 |
| SMALL SIGN SUPPORT SYSTEM<br>CHEVRON ALIGNMENT and OBJECT MARKER Signs<br>INSTALLATION-SINGLE POST ASSEMBLY |  | -----        |     |   |
|   |  | MTOD 990.105 |     |   |